



## LED EcoMax DC 24V Strip

### Features

- Efficacy up to 120lm/w, lifetime 20000H
- DC 24V, length 10M
- Flicker free

### Benefits

- High quality
- Energy efficient
- Safety and easy installation

### Application



Hotel



Restaurant



Shopping Mall



Home



Hospital

### Specification

Product Description	Power (W/m)	SDCM	Lumen (lm/m)	Efficacy (lm/w)	CRI	CCT (K)	Lifetime (hrs)
LED-E-24/2835-5W/42-830-Tube-10M	5	<5	570	114	80	3000	20000
LED-E-24/2835-5W/42-840-Tube-10M	5	<5	570	114	80	4000	20000
LED-E-24/2835-5W/42-865-Tube-10M	5	<5	570	114	80	6500	20000
LED-E-24/2835-10W/98-830-Tube-10M	10	<5	1100	110	80	3000	20000
LED-E-24/2835-10W/98-840-Tube-10M	10	<5	1100	110	80	4000	20000
LED-E-24/2835-10W/98-865-Tube-10M	10	<5	1100	110	80	6500	20000
LED-E-24/2835-5W/42-830-Bare-10M	5	<5	570	114	80	3000	20000
LED-E-24/2835-5W/42-840-Bare-10M	5	<5	600	120	80	4000	20000
LED-E-24/2835-5W/42-865-Bare-10M	5	<5	600	120	80	6500	20000
LED-E-24/2835-10W/98-830-Bare-10M	10	<5	1100	110	80	3000	20000
LED-E-24/2835-10W/98-840-Bare-10M	10	<5	1200	120	80	4000	20000
LED-E-24/2835-10W/98-865-Bare-10M	10	<5	1200	120	80	6500	20000

#### Application Conditions

IP	IP20(Bare) IP65(Tube)
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-45C


#### Mechanical Properties

Optical Material	PVC
Housing Material	PVC
Finishing Colour	Transparency

#### Electrical Supply

Frequency (Hz)	50/ 60
Voltage (V)	24
AC/DC	DC


## CB




## Packaging Information

Item Description	Single Box(1pc/box)		Packaging Unit			Remark
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)	
LED-E-24/2835-5W/42-830-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-5W/42-840-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-5W/42-865-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-830-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-840-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-865-Tube-10M	10000*10*4	0.405	525*320*245	16.2	40	1*40roll (10m/roll)
LED-E-24/2835-5W/42-830-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-24/2835-5W/42-840-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-24/2835-5W/42-865-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-830-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-840-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-24/2835-10W/98-865-Bare-10M	10000*8*2.5	0.155	450*235*220	6.2	40	1*40roll (10m/roll)
LED-E-Strip-Driver-60W(1*2)-24CV	370*49*44	0.504	420*260*195	10.08	20	20pcs
LED-E-Strip-Driver-60W(1*1)-24CV	265*49*39	0.293	315*255*270	8.79	30	30pcs
LED-E-Strip-24V-Input Connector-5A-Bare	\	0.002	285*220*245	2.00	1000	20*50
LED-E-Strip-24V- Middle Connector-5A-Bare	\	0.003	285*220*246	6.00	2000	20*100
LED-E-Strip-Fixing Clip-Tube	\	0.002	285*220*247	20.00	10000	100*100

## Dimensional Drawing

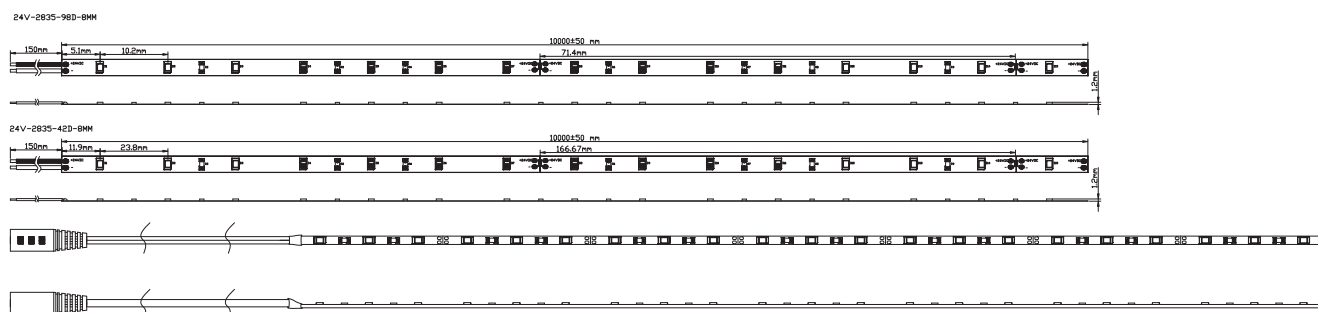

## Accessory Information

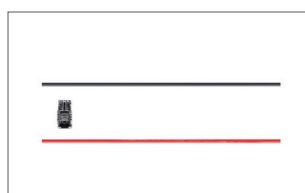


Input Connector



Middle Connector



LED Driver 60W & 60W×2

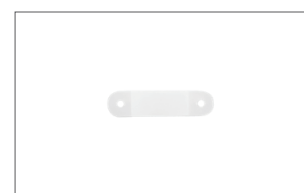

Fixing Clip

### OPPLE SHANGHAI OFFICE

Building V3, The Mixc,1799 Wuzhong Road,  
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

[WWW.OPPLE.COM/EN](http://WWW.OPPLE.COM/EN)