



LED Utility2 T8 Tube

Features

- Flicker-free and no blue light hazard
- Lifetime 15000h, surge protection 1500V
- Super bright, 18W 1900lm, 9W 950lm, PF0.5, SDCM < 6, CRI70
- Double end design

Benefits

- Eyes care, minimize eyestrain and protect retina
- Reliable and long-lasting, lower maintenance cost
- Super bright bring premium lighting experience
- Easy installation

Application



Home



Hotel



Restaurant



Shopping Mall

Specification

Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (K)	Life Time (hrs) L70
LED T8 U2 dbl 9W 600mm	9	0.5	900	100	70	3000	15000
LED T8 U2 dbl 9W 600mm	9	0.5	950	105	70	4000	15000
LED T8 U2 dbl 9W 600mm	9	0.5	950	105	70	6500	15000
LED T8 U2 dbl 18W 1200mm	18	0.5	1800	100	70	3000	15000
LED T8 U2 dbl 18W 1200mm	18	0.5	1900	105	70	4000	15000
LED T8 U2 dbl 18W 1200mm	18	0.5	1900	105	70	6500	15000

Application Conditions

IP	IP20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical Properties

Optical Material	Glass
Housing Material	Aluminum
Finishing Colour	White


Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Packaging Information

Item Description	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
LED T8 U2 dbl 9W 600mm	624*30*30	0.16	640*170*170	4	25
LED T8 U2 dbl 18W 1200mm	1224*30*30	0.28	1240*170*170	6.95	25
LED U T8 empty batten 1200mm dbl	1200*34.5*18.5	0.40	1253*192*120	12.00	30
LED U2 T8 empty batten 600mm dbl	611*34.5*18.5	0.23	645*195*113	6.99	30
LED U2 T8 empty batten 1200mm dbl R	/	/	1255*210*155	13.2	15
LED U2 T8 empty batten 1200mm dbl TT	/	/	1255*170*180	9.2	10
LED U2 T8 empty batten 1200mm dbl TTR	/	/	1255*170*183	10.6	9

Dimensional Drawing

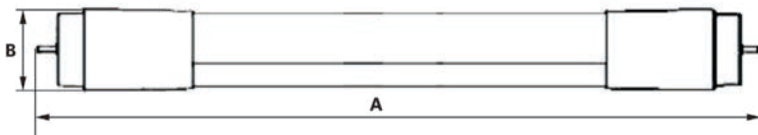

	9W	18W
A (mm)	L604	L1213
B (mm)	Φ28	Φ28

Accessory Information



LED Utility2 T8 Empty Batten
(Match with Double-ended T8 Tube)