

## LED EcoMax1 T5 Batten

### Features

- Integrated design with plastic unibody
- Flicker-free and no blue light hazard
- Energy saving, Lifetime 15000h
- Broad range of lengths and color temperatures
- Plug and play design

### Benefits

- Continuous light with no dark spots and anti-shock
- Eyes care, minimize eyestrain and protect retina
- Low maintenance costs
- Provide the choices for various lighting spaces
- Easy installation

### Application



Home



Parking



Shopping Mall



Hotel



Office

### Specification

Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (K)	Life Time (hrs)
LED E1 T5 batten 310mm 3.5W A	3.5	0.5	300	86	75	3000	20000
LED E1 T5 batten 310mm 3.5W A	3.5	0.5	300	86	75	4000	20000
LED E1 T5 batten 310mm 3.5W A	3.5	0.5	300	86	75	5700	20000
LED E1 T5 batten 570mm 7W A	7	0.5	600	86	75	3000	20000
LED E1 T5 batten 570mm 7W A	7	0.5	600	86	75	4000	20000
LED E1 T5 batten 570mm 7W A	7	0.5	600	86	75	5700	20000
LED E1 T5 batten 870mm 10.5W A	10.5	0.5	900	86	75	3000	20000
LED E1 T5 batten 870mm 10.5W A	10.5	0.5	900	86	75	4000	20000
LED E1 T5 batten 870mm 10.5W A	10.5	0.5	900	86	75	5700	20000
LED E1 T5 batten 1170mm 14W A	14	0.5	1200	86	75	3000	20000
LED E1 T5 batten 1170mm 14W A	14	0.5	1200	86	75	4000	20000
LED E1 T5 batten 1170mm 14W A	14	0.5	1200	86	75	5700	20000

#### Application Conditions

IP	20
Operating Temperature	-10-40°C
Application Temperature	25°C
Storage Environment	-25-50°C

#### Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC / DC	AC

#### Mechanical Properties


Optical Material	PC
Housing Material	PC
Finishing Colour	White

CE CB

## Packaging Information

Product Description	Single Box(1pc/box)		Outer box		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	BOX QTY (pcs/unit)
LED E1 T5 batten 310mm 3.5W A	415x37x26	0.15	425x200x170	4.08	30
LED E1 T5 batten 570mm 7W A	675x37x26	0.19	685x200x170	5.4	30
LED E1 T5 batten 870mm 10.5W A	975x37x26	0.26	985x200x170	7.2	30
LED E1 T5 batten 1170mm 14W A	1275x37x26	0.32	1285x200x170	9.09	30
Leader Cable			105x105x185	0.6	30

## Dimensional Drawing

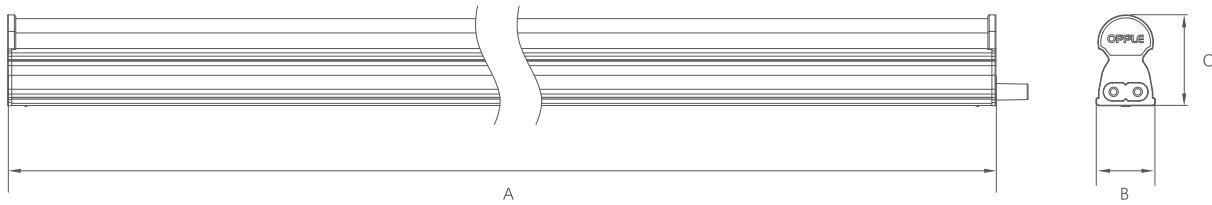

	3.5W	7W	10.5W	14W
A (mm)	310	570	870	1170
B (mm)	22	22	22	22
C (mm)	32.6	32.6	32.6	32.6

## Accessory Information



Leader Cable