



LED Spotlight Track UtilityIII


Features

- Easy to install
- Long lifespan
- Clean beam angle
- Flexible to highlight objects

Benefits

- High quality and economical COB chips with optical reflector provides clean light beam
- Better heat control in a classic outlook
- Flexible adjustment horizontally and vertically
- Easy and safe installation design for DIY

Application



Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam Angle (°)	CRI	Input Current (mA)	CCT(K)	Life Time (L70B50)	MOQ(pcs)
541001149800	LEDSpotTR-UIII 10W-3000-24D-BK-GP	10	0.5	700	70	24	>80	75	3000	20000	480
541001149900	LEDSpotTR-UIII 10W-4000-24D-BK-GP	10	0.5	720	72	24	>80	75	4000	20000	480
541001150000	LEDSpotTR-UIII 10W-5700-24D-BK-GP	10	0.5	720	72	24	>80	75	5700	20000	480
541001149500	LEDSpotTR-UIII 10W-3000-24D-WH-GP	10	0.5	700	70	24	>80	75	3000	20000	480
541001149600	LEDSpotTR-UIII 10W-4000-24D-WH-GP	10	0.5	720	72	24	>80	75	4000	20000	480
541001149700	LEDSpotTR-UIII 10W-5700-24D-WH-GP	10	0.5	720	72	24	>80	75	5700	20000	480
541001150400	LEDSpotTR-UIII 20W-3000-24D-BK-GP	20	0.5	1600	80	24	>80	160	3000	20000	480
541001150500	LEDSpotTR-UIII 20W-4000-24D-BK-GP	20	0.5	1800	90	24	>80	160	4000	20000	480
541001150600	LEDSpotTR-UIII 20W-5700-24D-BK-GP	20	0.5	1800	90	24	>80	160	5700	20000	480
541001150100	LEDSpotTR-UIII 20W-3000-24D-WH-GP	20	0.5	1600	80	24	>80	160	3000	20000	480
541001150200	LEDSpotTR-UIII 20W-4000-24D-WH-GP	20	0.5	1800	90	24	>80	160	4000	20000	480
541001150300	LEDSpotTR-UIII 20W-5700-24D-WH-GP	20	0.5	1800	90	24	>80	160	5700	20000	480
541001151000	LEDSpotTR-UIII 30W-3000-24D-BK-GP	30	0.9	2400	80	24	>80	150	3000	20000	480
541001151100	LEDSpotTR-UIII 30W-4000-24D-BK-GP	30	0.9	2600	86.7	24	>80	150	4000	20000	480
541001151200	LEDSpotTR-UIII 30W-5700-24D-BK-GP	30	0.9	2600	86.7	24	>80	150	5700	20000	480
541001150700	LEDSpotTR-UIII 30W-3000-24D-WH-GP	30	0.9	2400	80	24	>80	150	3000	20000	480
541001150800	LEDSpotTR-UIII 30W-4000-24D-WH-GP	30	0.9	2600	86.7	24	>80	150	4000	20000	480
541001150900	LEDSpotTR-UIII 30W-5700-24D-WH-GP	30	0.9	2600	86.7	24	>80	150	5700	20000	480

Technical Specifications	
CRI	>80
Colour Consistency (SDCM)	<6
Dimmable	No
Housing Colour	White&Black
IP	IP20
IK	IK02
Driver integrated (Yes/No)	Yes
Glow wire test	650°C
Driver failure rate	1% at 5000h
Weight (pc/kg)	0.22/0.385/0.385

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC


Mechanical Properties	
Housing Material	Aluminium Alloy
Optical Material	PC

Application Conditions	
Operating Temperature	-10~45°C
Application Temperature	25°C
Storage Environment	-25~50°C

Packaging Information


Item Code	Item Description	Single Box(1pc/box)		Outer box		
		Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
541001149800	LEDspotTR-UIII 10W-3000-24D-BK-GP	100*65*146	0.267	350*215*310	5.34	20
541001149900	LEDspotTR-UIII 10W-4000-24D-BK-GP	100*65*146	0.267	350*215*310	5.34	20
541001150000	LEDspotTR-UIII 10W-5700-24D-BK-GP	100*65*146	0.267	350*215*310	5.34	20
541001149500	LEDspotTR-UIII 10W-3000-24D-WH-GP	100*65*146	0.267	350*215*310	5.34	20
541001149600	LEDspotTR-UIII 10W-4000-24D-WH-GP	100*65*146	0.267	350*215*310	5.34	20
541001149700	LEDspotTR-UIII 10W-5700-24D-WH-GP	100*65*146	0.267	350*215*310	5.34	20
541001150400	LEDspotTR-UIII 20W-3000-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001150500	LEDspotTR-UIII 20W-4000-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001150600	LEDspotTR-UIII 20W-5700-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001150100	LEDspotTR-UIII 20W-3000-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20
541001150200	LEDspotTR-UIII 20W-4000-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20
541001150300	LEDspotTR-UIII 20W-5700-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20
541001151000	LEDspotTR-UIII 30W-3000-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001151100	LEDspotTR-UIII 30W-4000-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001151200	LEDspotTR-UIII 30W-5700-24D-BK-GP	125*85*165	0.451	450*268*348	9.02	20
541001150700	LEDspotTR-UIII 30W-3000-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20
541001150800	LEDspotTR-UIII 30W-4000-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20
541001150900	LEDspotTR-UIII 30W-5700-24D-WH-GP	125*85*165	0.451	450*268*348	9.02	20

Dimensional Drawing

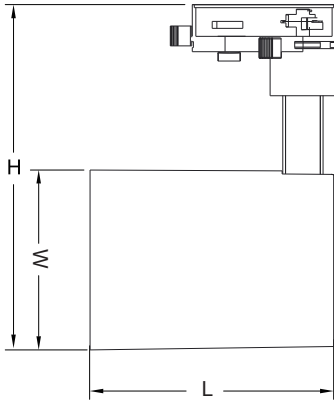

Type	L	W	H
LED SP-TR-U1111 10W-GP	90mm	60mm	140mm
LED SP-TR-U1111 20W-GP	120mm	80mm	160mm
LED SP-TR-U1111 30W-GP	120mm	80mm	160mm

Photometric Data

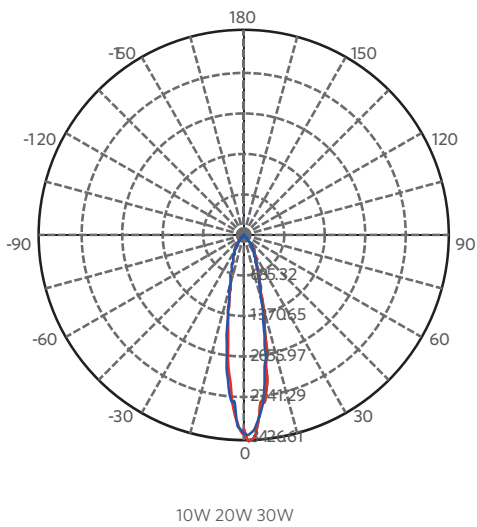

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China
ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN