



LED EcoMax Filament Bulb G45/A60

Features

- Reach same lighting performance as incandescent. *
- Above 134lm/W efficiency and 360°beam angle
- Energy efficient

Benefits

- Could replace incandescent lamps directly
- Light where you need it
- Up to 85% energy savings compared to incandescent bulb, 40% compared to CFL

Application



Home



Hotel



Retail

Specification

Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	CRI	CCT (K)	Average Lifetime(hrs)	Energy Level
LED E G45 E27 4W FILA	4	0.5	400	100	32	80	2700	20000	A++
LED E A60 E27 4W FILA	4	0.5	470	118	37	80	2700	20000	A++
LED E A60 E27 6W FILA	6	0.5	806	134	52	80	2700	20000	A++
LED E A60 E27 8W FILA	8	0.5	1055	132	64	80	2700	20000	A++

Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Application Conditions

IP	IP20
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical Properties


Optical Material	Glass
Housing Material	Glass
Finishing Colour	Clear

CB IEC Safety

Packaging Information

Product Description	Single Box(1pc/box)		Outer box		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	BOX QTY (pcs/unit)
LED E G45 E27 4W FILA	49x49x90	0.049	510x260x200	4.9	100
LED E A60 E27 4W FILA	62x62x124	0.065	640x330x270	6.5	100
LED E A60 E27 6W FILA	62x62x124	0.065	640x330x270	6.5	100
LED E A60 E27 8W FILA	62x62x124	0.065	640x330x270	6.5	100

Dimensional Drawing

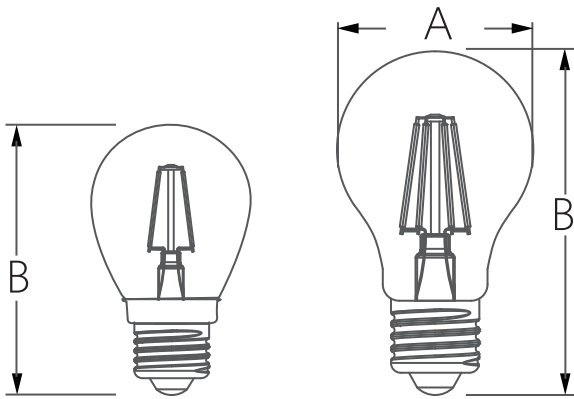

	G45 E27	A60 E27
A (mm)	Φ45	Φ60
B (mm)	80	110